



FALL 2024

FASTENERS, ANCHORS & TOOLS for the Door Industry | [www.tannerbolt.com](http://www.tannerbolt.com)

# Fasteners, Anchors & Tools For The Door Industry

- FASTENERS & ANCHORING SYSTEMS
- SECURITY / SAFETY / POWER TOOLS
- CUTTING TOOLS & ABRASIVES
- HAND TOOLS



[TannerBolt.com](http://TannerBolt.com) 800 456-2658



## WE OFFER A DIVERSE PRODUCT LINE OF FASTENERS, ANCHORS, FALL PROTECTION SYSTEMS AND TOOLS.

We are known nationwide for our specialty line of security fasteners and anchors.

We are a "Safety First" supplier featuring code-compliant concrete anchors for strength design, fall and drop protection systems & a wide array of personal protective equipment (PPE).

## Tanner Ships Nationwide

Tanner partners with its suppliers to utilize Nationwide Distribution Centers.

Our goal is to ship orders complete from our main warehouse in Brooklyn, NY but we want our customers to know there are options.

Tanner strategically utilizes its network of nationwide suppliers to help bring products to you faster where circumstances permit.

Utilizing this network, Tanner can often get your order to you faster!

## Locations and Pickup Centers


### Texas Pick Up Centers

SSG Texas-Arlington  
2020 Exchange Drive  
Arlington, TX 76011

SSG Texas-Houston  
423 Blueberry Street  
Houston, TX 77018









## Online Shopping & Shipping Solutions

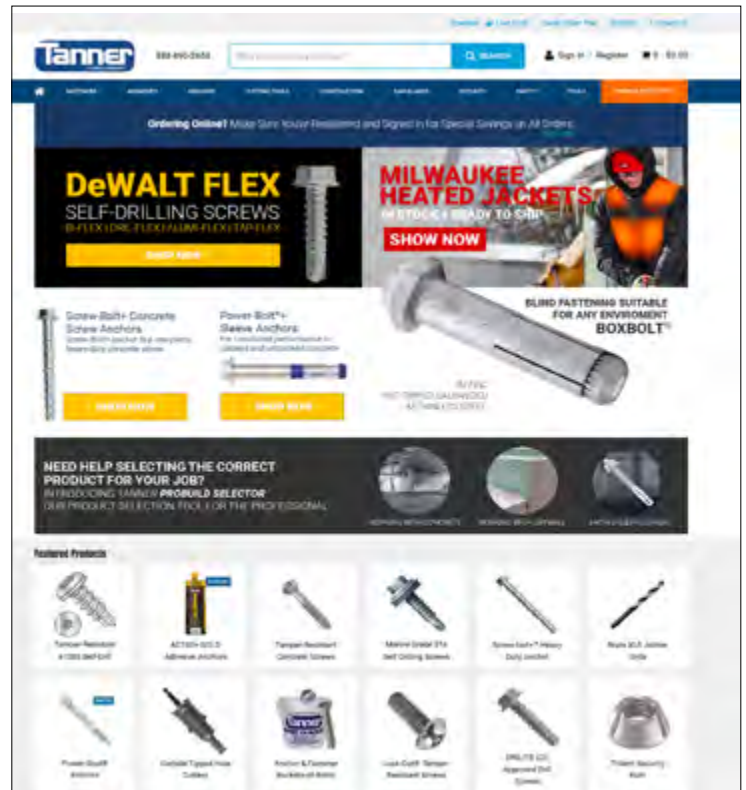

### TANNER LOCATIONS

|                                            |                |
|--------------------------------------------|----------------|
| 714 Montauk Ave., Brooklyn, NY 11208       | (718) 434-4500 |
| 60-01 55th Drive, Maspeth, NY 11378        | (718) 786-2050 |
| 800 3rd Ave., Brooklyn, NY 11232           | (929) 337-1821 |
| 168 Broadhollow Rd., Farmingdale, NY 11735 | (631) 694-4935 |
| 1 Adele Road, Woburn, MA 01801             | (617) 431-3143 |
| 850 Flora Street, Elizabeth, NJ 07201      | 908) 882-9911  |

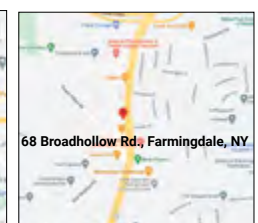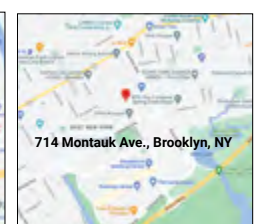



## LOK-BOLT AS™ SLEEVE TYPE EXPANSION ANCHORS

The Lok-Bolt AS™ is an all steel pre-assembled single unit sleeve anchor which can be used in concrete and masonry units.



### LOK-BOLT AS™ FLAT HEAD

CARBON STEEL & STAINLESS STEEL, COMBO DRIVE



| SKU        | SKU        | SIZE      | DRILL DIA. | BOX QTY. | CTN. QTY. | SKU    | BUCKET QTY. |
|------------|------------|-----------|------------|----------|-----------|--------|-------------|
| POW 05345S | POW 06174S | 3/8" x 4" | 3/8"       | 50       | 250       | TB-542 | 400         |
| POW 05350S | POW 06175S | 3/8" x 5" | 3/8"       | 50       | 250       | TB-544 | 250         |
| POW 05360S | POW 06176S | 3/8" x 6" | 3/8"       | 50       | 250       | TB-545 | 250         |

- New compression sleeve crushes for tighter clamping forces.
- Fits easily through window and door jambs without hanging up.
- One-piece all-steel design -- Immediate loading.
- Ideal for hollow or solid concrete masonry & normal weight concrete.
- Extension sleeves can be added to create longer lengths.




### LOK-BOLT AS™ EXTENDERS CARBON STEEL

| SKU       | SIZE          | DRILL | QTY | CARTON |
|-----------|---------------|-------|-----|--------|
| POW 05684 | 3/8" x 1-1/4" | 3/8"  | 50  | 500    |

## UltraCon® DOOR FRAME FASTENERS



UltraCon door frame fasteners are the optimal solution for installing metal door systems to concrete, block or hollow block or wood.

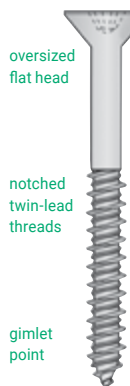

- One-piece, cold-formed product provides improved strength and reliability
- Oversized flat head (.690" dia.)
  - Fits pre-punched countersunk areas of metal frame, allowing full clearance
  - Provides a wider bearing surface
- Common drive system (#3 Phillips) eases installation

#### Features & Benefits

- Twin-lead threads
- Finish: Silver Stalgard corrosion-resistant coating
  - provides 1000 hours of salt spray resistance per ASTM B117
- Install quickly using a 1/4" masonry drill bit and a #3 phillips bit
- Consistent performance
- Provides maximum pull-out strengths
- Eliminates need for inserts

### FLAT PHILLIPS HEAD OVERSIZED DOOR FRAME ANCHOR

| SKU            | SIZE       | QTY. | SKU            | SIZE       | QTY. |
|----------------|------------|------|----------------|------------|------|
| DEW DFM5ELG203 | 5/16" x 3" | 50   | DEW DFM5ELG205 | 5/16" x 5  | 50   |
| DEW DFM5ELG204 | 5/16" x 4" | 50   | DEW DFM5ELG206 | 5/16" x 6" | 50   |



### 2 CUTTER SDS+ CARBIDE BITS

- Carbide tip design maximizes carbide surface contact for longer bit life
- Elongated Four Flute Helix for Faster Material Removal
- Increased Steel Prevents Breakage

| SKU        | SIZE       | USABLE LENGTH | SKU        | SIZE          | USABLE LENGTH |
|------------|------------|---------------|------------|---------------|---------------|
| DEW DW5417 | 1/4" x 6"  | 4"            | DEW DW5418 | 1/4" x 8-1/2" | 6-1/2"        |
| DEW DW5420 | 1/4" x 12" | 10"           | DEW DW5421 | 1/4" x 14"    | 12"           |



## NYLON FRAME EXPANSION FIXING ANCHORS

The ETA approval covers use in a range of solid and hollow building materials, and guarantees a secure fixing.

- A specially developed combination of plugs & screws ensures the very best handling. The plug's noticeable hold, makes installation convenient.
- Approved for a variety of solid and hollow building materials, such as concrete, brick and thermal insulation blocks



| SKU      | SIZE          | DRIVE | MAX FIXTURE THICKNESS | BOX QTY. | SKU    | BUCKET QTY. |
|----------|---------------|-------|-----------------------|----------|--------|-------------|
| F1-46264 | 3/8" x 4"     | T-40  | 2"                    | 50       | TB-905 | 500         |
| F1-46265 | 3/8" x 4-1/2" | T-40  | 2-3/4"                | 50       | —      | —           |
| F1-46266 | 3/8" x 5-1/2" | T-40  | 3-1/2"                | 50       | TB-906 | 250         |
| F1-46267 | 3/8" x 6-1/4" | T-40  | 4-5/16"               | 50       | TB-907 | 250         |
| F1-46268 | 3/8" x 7"     | T-40  | 5-1/8"                | 50       | —      | —           |

### 3/8" WOOD SCREWS

3/8" Flat Head Wood Screws, Phillips Drive, Zinc Plated

A thread forming screw having a gimlet point and a sharp crested coarse pitch thread. Wood screws are produced with cut threads that have a tapered shank. Will produce a mating thread when assembled into wood or other resilient materials. Typically used in the door industry to install door frames into wood.



| SIZE         | SKU        | BOX QTY. | SKU      | BUCKET QTY. |
|--------------|------------|----------|----------|-------------|
| #24 x 4"     | 24N4000FPZ | 50       | TB-900-A | 500         |
| #24 x 4-1/2" | 24N4500FPZ | 50       | TB-901-A | 400         |
| #24 x 5"     | 24N5000FPZ | 50       | TB-902-A | 300         |
| #24 x 6"     | 24N6000FPZ | 50       | TB-904-A | 250         |

## DEWALT

### MASONRY FASTENING SYSTEM

The system consists of three elements: cold formed carbon steel concrete screws, precision cut carbide drill bits and high quality installation tools. When all three parts of the system are used, consistent performance and maximum pull-out strengths can be realized.

- Quick installation, 2 to 3 fasteners per minute.
- Twin-lead threads mechanically link to masonry, increasing joint integrity.
- Blue Stalgard® coating provides 1000 hrs. of salt spray resistance (per ASTM B117)

#### ULTRACON®+ FLAT HEAD PHILLIPS BLUE STALGARD®



| SKU          | SIZE          | BOX QTY. | SKU    | BUCKET QTY. |
|--------------|---------------|----------|--------|-------------|
| DEW DFM12760 | 1/4" x 1-1/4" | 100      | TB-877 | 2500        |
| DEW DFM12762 | 1/4" x 1-3/4" | 100      | TB-878 | 2500        |
| DEW DFM12764 | 1/4" x 2-1/4" | 100      | TB-879 | 1500        |
| DEW DFM12766 | 1/4" x 2-3/4" | 100      | TB-880 | 1000        |
| DEW DFM12768 | 1/4" x 3-1/4" | 100      | TB-881 | 1000        |
| DEW DFM12770 | 1/4" x 3-3/4" | 100      | TB-882 | 1000        |
| DEW DFM12772 | 1/4" x 4"     | 100      | TB-883 | 1000        |
| DEW DFM12774 | 1/4" x 5"     | 100      | -      | -           |
| DEW DFM12776 | 1/4" x 6"     | 100      | -      | -           |

Note: All fasteners are packed 100/bx with one drill bit

#### ULTRACON®+



#### Approvals


ICC†, Miami-Dade, and Florida Building Code Approved

#### Stalgard Coating

Provides 1,000 hrs. Salt Spray Corrosion Resistance

#### Color Offering\*\*

Available in Blue, White, Silver, or Bronze

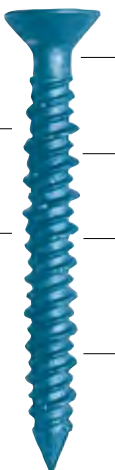

#### Base Material

Approved for Concrete, Masonry, Wood-to-Wood, or Treated Lumber

#### Thread Design

Self Tapping Hi-Low Thread

#### Diameters

Available in 3/16", 1/4" and 5/16"

#### Gimlet Point

Self Drilling into Wood Base Material

## DEWALT

### 2 CUTTER SDS+ CARBIDE BITS

- Carbide tip design maximizes carbide surface contact for longer bit life
- Elongated Four Flute Helix for Faster Material Removal
- Increased Steel Prevents Breakage



#### 2 CUTTER SDS+ CARBIDE



| SKU        | SIZE           | USABLE LENGTH | SKU           | STD POUCH |
|------------|----------------|---------------|---------------|-----------|
| DEW DW5402 | 3/16" x 4"     | 2"            | DEW DW5402B25 | 25        |
| DEW DW5403 | 3/16" x 6-1/2" | 4-1/2"        | DEW DW5403B25 | 25        |
| DEW DW5404 | 3/16" x 8-1/2" | 6-1/2"        | DEW DW5404B25 | 25        |
| DEW DW5405 | 3/16" x 10"    | 8"            | DEW DW5405B25 | 25        |
| DEW DW5406 | 3/16" x 12"    | 10"           | DEW DW5406B25 | 25        |
| DEW DW5416 | 1/4" x 4"      | 2"            | DEW DW5416B25 | 25        |
| DEW DW5417 | 1/4" x 6"      | 4"            | DEW DW5417B25 | 25        |
| DEW DW5418 | 1/4" x 8-1/2"  | 6-1/2"        | DEW DW5418B25 | 25        |
| DEW DW5424 | 5/16" x 6"     | 4"            | DEW DW5424B25 | 25        |
| DEW DW5427 | 3/8" x 6"      | 4"            | DEW DW5427B25 | 25        |
| DEW DW5437 | 1/2" x 6"      | 4"            | DEW DW5437B25 | 25        |
| DEW DW5446 | 5/8" x 8"      | 6"            | DEW DW5446B10 | 10        |

#### 2 CUTTER SDS+ 5 PC. CARBIDE BITS SET

| SKU        | INCLUDED                                                                                |
|------------|-----------------------------------------------------------------------------------------|
| DEW DW5470 | 3/16" x 4-1/2" x 6-1/2", 1/4" x 2" x 4", 1/4" x 4" x 6", 3/8" x 4" x 6", 1/2" x 4" x 6" |

#### 2 CUTTER SDS+ DRILL BITS

MATCH TOLERANCE FOR 1/4" ULTRACON®+ SCREWS.

| SKU        | SIZE       |
|------------|------------|
| DEW DW5382 | 3/16" x 7" |

#### ULTRACON®+ INSTALLATION KIT



| SKU        | DESCRIPTION                                                                                                                                                                                                 |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DEW DW5366 | UltraCon®+ Installation Kit includes: 5/32" and 3/16" UltraCon+ bit, 1/4" and 5/16" nutsetters, #2 and #3 Phillips bits, Phillips flat head adapter, percussion adapter, drive sleeve and 1/8" allen wrench |

\* Only 3/16" & 1/4" carbon steel diameters are ICC approved in select lengths \*\* Some color options are limited in head style and diameter offerings + ICC approved for 3/16" & 1/4" carbon steel diameters

## SELF DRILLING SCREWS

Self-drilling screws or tek screws are available in a variety of head styles, thread lengths and drill flute lengths for screw diameters #6 through 5/16"-18.



### OVAL PHILLIPS HEAD ZINC PLATED GLAZING BEAD SCREWS

| SKU        | SIZE         | PT. SIZE | DRIVE SIZE | BOX QTY. | SKU             | CTN QTY. |
|------------|--------------|----------|------------|----------|-----------------|----------|
| 6N100UOVZ  | #6 x 1"      | #2       | #2         | 1000     | 6N100UOVZ/BULK  | 9000     |
| 6N125UOVZ  | #6 x 1-1/4"  | #2       | #2         | 1000     | 6N125UOVZ/BULK  | 800      |
| 8N75UOVZ   | #8 x 3/4"    | #2       | #2         | 1000     | 8N75UOVZ/BULK   | 6000     |
| 8N100UOVZ  | #8 x 1"      | #2       | #2         | 1000     | 8N100UOVZ/BULK  | 7000     |
| 8N125UOVZ  | #8 x 1-1/4"  | #2       | #2         | 500      | 8N125UOVZ/BULK  | 4000     |
| 8N150UOVZ  | #8 x 1-1/2"  | #2       | #2         | 500      | 8N150UOVZ/BULK  | 5000     |
| 10N75UOVZ  | #10 x 3/4"   | #2       | #3         | 500      | 10N75UOVZ/BULK  | 8000     |
| 10N100UOVZ | #10 x 1"     | #2       | #3         | 500      | 10N100UOVZ/BULK | 5000     |
| 10N125UOVZ | #10 x 1-1/4" | #2       | #3         | 500      | 10N125UOVZ/BULK | 3000     |
| 10N150UOVZ | #10 x 1-1/2" | #2       | #3         | 500      | 10N150UOVZ/BULK | 3000     |



### FLAT PHILLIPS HEAD UNDERCUT

ZINC PLATED, CONTINUOUS HINGE INSTALLATION SCREW

| SKU        | SIZE            | PT. SIZE | BOX QTY. | SKU             | CTN QTY. |
|------------|-----------------|----------|----------|-----------------|----------|
| 12C68UFLZ  | #12-24 x 11/16" | #2       | 500      | 12C68UFLZ/BULK  | 5000     |
| 12C100UFLZ | #12-24 x 1"     | #3       | 500      | 12C100UFLZ/BULK | 5000     |

Flat undercut heads are supplied to provide larger usable thread. Head height of undercut is approximately 2/3 that of standard flat head screws. Drive depths are reduced proportionately.



### OVAL PHILLIPS HEAD

ZINC PLATED, DOOR CLOSER INSTALLATION SCREW

| SKU        | SIZE            | PT. SIZE | BOX QTY. | SKU             | CTN QTY. |
|------------|-----------------|----------|----------|-----------------|----------|
| 14C75UOVZ  | #14-24 x 3/4"   | #3       | 500      | 14C75UOVZ/BULK  | 4000     |
| 14C100UOVZ | #14-24 x 1"     | #3       | 500      | 14C100UOVZ/BULK | 3000     |
| 14C250UOVZ | #14-24 x 2-1/2" | #3       | 100      | 14C250UOVZ/BULK | 1000     |



### PAN PHILLIPS HEAD ZINC PLATED -BUCKETS

| SKU    | SIZE       | BUCKET QTY. | SKU    | SIZE         | BUCKET QTY. |
|--------|------------|-------------|--------|--------------|-------------|
| TB-600 | #8 x 1/2"  | 10000       | TB-612 | #10 x 3/4"   | 7000        |
| TB-602 | #8 x 3/4"  | 10000       | TB-614 | #10 x 1"     | 5000        |
| TB-604 | #8 x 1"    | 8000        | TB-616 | #10 x 1-1/2" | 2500        |
| TB-610 | #10 x 1/2" | 10000       |        |              |             |



### FLAT UNDERCUT PHILLIPS HEAD 410 STAINLESS STEEL

| SKU           | SIZE         | PT. SIZE | BOX QTY. | SKU                | CTN QTY. |
|---------------|--------------|----------|----------|--------------------|----------|
| 6N50UFP4/UC   | #6 x 1/2"    | #2       | 100      | 6N50UFP4/UC/BULK   | 5000     |
| 8N75UFP4/UC   | #8 x 3/4"    | #2       | 100      | 8N75UFP4/UC/BULK   | 5000     |
| 8N100UFP4/UC  | #8 x 1"      | #2       | 100      | 8N100UFP4/UC/BULK  | 3500     |
| 10N75UFP4/UC  | #10 x 3/4"   | #3       | 100      | 10N75UFP4/UC/BULK  | 7000     |
| 10C100UFP4/UC | #10-24 x 1"  | #3       | 100      | 10C100UFP4/UC/BULK | 5000     |
| 12N75UFP4/UC  | #12 x 3/4"   | #3       | 100      | 12N75UFP4/UC/BULK  | 2500     |
| 12N100UFP4/UC | #12 x 1"     | #3       | 100      | 12N100UFP4/UC/BULK | 2500     |
| 12N150UFP4/UC | #12 x 1-1/2" | #3       | 100      | 12N150UFP4/UC/BULK | 1500     |
| 14N75UFP4/UC  | #14 x 3/4"   | #3       | 100      | 14N75UFP4/UC/BULK  | 2000     |
| 14N100UFP4/UC | #14 x 1"     | #3       | 100      | 14N100UFP4/UC/BULK | 1500     |



### OVAL PHILLIPS HEAD 410 STAINLESS STEEL

| SKU        | SIZE         | PT. SIZE | DRIVE SIZE | BOX QTY. |
|------------|--------------|----------|------------|----------|
| 8N100UOV4  | #8 x 1"      | #2       | #2         | 100      |
| 8N125UOV4  | #8 x 1-1/4"  | #2       | #2         | 100      |
| 10N125UOV4 | #10 x 1-1/4" | #3       | #3         | 100      |



### PAN PHILLIPS HEAD 410 STAINLESS STEEL

| SKU       | SIZE        | PT. SIZE | BOX QTY. |
|-----------|-------------|----------|----------|
| 6N37UPP4  | #6 x 3/8"   | #2       | 100      |
| 6N50UPP4  | #6 x 1/2"   | #2       | 100      |
| 6N62UPP4  | #6 x 5/8"   | #2       | 100      |
| 6N75UPP4  | #6 x 3/4"   | #2       | 100      |
| 6N100UPP4 | #6 x 1"     | #2       | 100      |
| 6N150UPP4 | #6 x 1-1/2" | #2       | 100      |

"We have been using Tanner for 19 years and they have always had the best prices. When call them you can speak to a rep and they get it done."



## Torx® Equivalent 6-lobe With Pin Self-Drilling Screws

Torx® equivalent 6-lobe with pin self-drilling-screws eliminate separate drilling and tapping operations for faster, more economical installations. The fastener is very difficult to remove without a special tamper-resistant Torx® Drive tool.

### BUTTON HEAD CASE HARDENED STEEL 100/BX

| SKU        | SIZE         | DRIVE SIZE | SKU        | SIZE          | DRIVE SIZE |
|------------|--------------|------------|------------|---------------|------------|
| 8N50UBTZ   | #8 x 1/2"    | 15TXH      | 12N100UBTZ | #12 x 1"      | 25TXH      |
| 8N100UBTZ  | #8 x 1"      | 15TXH      | 12N150UBTZ | #12 x 1-1/2"  | 25TXH      |
| 8N75UBTZ   | #8 x 3/4"    | 15TXH      | 14N75UBTZ  | #14 x 3/4"    | 27TXH      |
| 8N150UBTZ  | #8 x 1-1/2"  | 15TXH      | 14N100UBTZ | #14 x 1"      | 27TXH      |
| 10N50UBTZ  | #10 x 1/2"   | 25TXH      | 14N150UBTZ | #14 x 1-1/2"  | 27TXH      |
| 10N75UBTZ  | #10 x 3/4"   | 25TXH      | 14N200UBTZ | #14 x 2"      | 27TXH      |
| 10N100UBTZ | #10 x 1"     | 25TXH      | 25F75UBTZ  | 1/4-28 x 3/4" | 27TXH      |
| 10N150UBTZ | #10 x 1-1/2" | 25TXH      | 25F100UBTZ | 1/4-28 x 1"   | 27TXH      |
| 10N200UBTZ | #10 x 2"     | 25TXH      |            |               |            |



### FLAT HEAD CASE HARDENED STEEL 100/BX

| SKU        | SIZE        | DRIVE SIZE | SKU        | SIZE         | DRIVE SIZE |
|------------|-------------|------------|------------|--------------|------------|
| 8N50UFTZ   | #8 x 1/2"   | 15TXH      | 10N100UFTZ | #10 x 1"     | 25TXH      |
| 8N75UFTZ   | #8 x 3/4"   | 15TXH      | 10N150UFTZ | #10 x 1-1/2" | 25TXH      |
| 8N100UFTZ  | #8 x 1"     | 15TXH      | 10N200UFTZ | #10 x 2"     | 25TXH      |
| 8N125UFTZ  | #8 x 1-1/4" | 15TXH      | 14N100UFTZ | #14 x 1"     | 25TXH      |
| 8N150UFTZ  | #8 x 1-1/2" | 15TXH      | 14N150UFTZ | #14 x 1-1/2" | 25TXH      |
| 10N50UFTZ* | #10 x 1/2"  | 25TXH      | 14N200UFTZ | #14 x 2"     | 25TXH      |
| 10N75UFTZ  | #10 x 3/4"  | 25TXH      |            |              |            |



### OVAL HEAD CASE HARDENED STEEL 100/BX

| SKU       | SIZE       | DRIVE SIZE | SKU       | SIZE        | DRIVE SIZE |
|-----------|------------|------------|-----------|-------------|------------|
| 6N125UOTZ | #6 X1-1/4" | 15TXH      | 8N125UOTZ | #8 x 1-1/4" | 20TXH      |



### FLAT HEAD UNDERCUT ZINC PLATED, CONTINUOUS HINGE INSTALLATION SCREW

| SKU       | SIZE            | DRIVE SIZE | BOX QTY. | SKU            | CARTON QTY. |
|-----------|-----------------|------------|----------|----------------|-------------|
| 12C68UFTZ | #12-24 x 11/16" | 20TXH      | 100      | 12C68UFTZ/BULK | 5000        |



## INSTALLATION TOOLS

| SKU   | SIZE | HEX SIZE | LGTH. | SKU   | SIZE | HEX SIZE | LGTH. | SKU   | SIZE | HEX SIZE | LGTH. |
|-------|------|----------|-------|-------|------|----------|-------|-------|------|----------|-------|
| 10TXH | #10  | 1/4"     | 1"    | 20TXH | #20  | 1/4"     | 1"    | 27TXH | #27  | 1/4"     | 1"    |
| 15TXH | #15  | 1/4"     | 1"    | 25TXH | #25  | 1/4"     | 1"    | 30TXH | #30  | 1/4"     | 1"    |

## Hardened 410 Stainless Steel



### PAN HEAD 410 STAINLESS STEEL 100/BX

| SKU        | LENGTH       | DRIVE SIZE | SKU        | LENGTH       | DRIVE SIZE |
|------------|--------------|------------|------------|--------------|------------|
| 6N37UPT4   | #6 x 3/8"    | 15TXH      | 10N200UPT4 | #10 x 2"     | 25TXH      |
| 6N50UPT4   | #6 x 1/2"    | 15TXH      | 12N75UPT4  | #12 x 3/4"   | 27TXH      |
| 8N50UPT4   | #8 x 1/2"    | 20TXH      | 12N100UPT4 | #12 x 1"     | 27TXH      |
| 8N75UPT4   | #8 x 3/4"    | 20TXH      | 12N125UPT4 | #12 x 1-1/4" | 27TXH      |
| 8N100UPT4  | #8 x 1"      | 20TXH      | 12N150UPT4 | #12 x 1-1/2" | 27TXH      |
| 8N125UPT4  | #8 x 1-1/4"  | 20TXH      | 12N200UPT4 | #12 x 2"     | 27TXH      |
| 8N150UPT4  | #8 x 1-1/2"  | 20TXH      | 14N75UPT4  | #14 x 3/4"   | 30TXH      |
| 10N50UPT4  | #10 x 1/2"   | 25TXH      | 14N100UPT4 | #14 x 1"     | 30TXH      |
| 10N75UPT4  | #10 x 3/4"   | 25TXH      | 14N125UPT4 | #14 x 1-1/4" | 30TXH      |
| 10N100UPT4 | #10 x 1"     | 25TXH      | 14N150UPT4 | #14 x 1-1/2" | 30TXH      |
| 10N150UPT4 | #10 x 1-1/2" | 25TXH      | 14N200UPT4 | #14 x 2"     | 30TXH      |
| 10N125UPT4 | #10 x 1-1/4" | 25TXH      |            |              |            |

### FLAT HEAD 410 STAINLESS STEEL 100/BX

| SKU        | LENGTH       | DRIVE SIZE | SKU        | LENGTH       | DRIVE SIZE |
|------------|--------------|------------|------------|--------------|------------|
| 6N50UFT4   | #6 x 1/2"    | 10TXH      | 10N250UFT4 | #10 x 2-1/2" | 20TXH      |
| 6N75UFT4   | #6 x 3/4"    | 10TXH      | 10N300UFT4 | #10 x 3"     | 20TXH      |
| 6N100UFT4  | #6 x 1"      | 10TXH      | 12N75UFT4  | #12 x 3/4"   | 25TXH      |
| 6N125UFT4  | #6 x 1-1/4"  | 10TXH      | 12N100UFT4 | #12 x 1"     | 25TXH      |
| 6N150UFT4  | #6 x 1-1/2"  | 10TXH      | 12N125UFT4 | #12 x 1-1/4" | 25TXH      |
| 8N50UFT4   | #8 x 1/2"    | 15TXH      | 12N150UFT4 | #12 x 1-1/2" | 25TXH      |
| 8N75UFT4   | #8 x 3/4"    | 15TXH      | 12N200UFT4 | #12 x 2"     | 25TXH      |
| 8N100UFT4  | #8 x 1"      | 15TXH      | 12N250UFT4 | #12 x 2-1/2" | 25TXH      |
| 8N125UFT4  | #8 x 1-1/4"  | 15TXH      | 12N300UFT4 | #12 x 3"     | 25TXH      |
| 8N150UFT4  | #8 x 1-1/2"  | 15TXH      | 14N75UFT4  | #14 x 3/4"   | 27TXH      |
| 8N200UFT4  | #8 x 2"      | 15TXH      | 14N100UFT4 | #14 x 1"     | 27TXH      |
| 10N50UFT4  | #10 x 1/2"   | 20TXH      | 14N125UFT4 | #14 x 1-1/4" | 27TXH      |
| 10N75UFT4  | #10 x 3/4"   | 20TXH      | 14N150UFT4 | #14 x 1-1/2" | 27TXH      |
| 10N100UFT4 | #10 x 1"     | 20TXH      | 14N200UFT4 | #14 x 2"     | 27TXH      |
| 10N125UFT4 | #10 x 1-1/4" | 20TXH      | 14N250UFT4 | #14 x 2-1/2" | 27TXH      |
| 10N150UFT4 | #10 x 1-1/2" | 20TXH      | 14N300UFT4 | #14 x 3"     | 27TXH      |
| 10N200UFT4 | #10 x 2"     | 20TXH      |            |              |            |



Packaged individually. Bulk packaging available.

| SKU   | SIZE                                                                                 | HEX SIZE | LGTH.  | SKU   | SIZE | HEX SIZE | LGTH.  |
|-------|--------------------------------------------------------------------------------------|----------|--------|-------|------|----------|--------|
| 40TXH | #40                                                                                  | 1/4"     | 1"     | 50TXH | #50  | 5/16"    | 1-3/8" |
| 45TXH | #45                                                                                  | 5/16"    | 1-3/8" | 55TXH | #55  | 5/16"    | 1-3/8" |
| TK-TX | Kit contains one each #10, #15, #20, #25, #27, #30 with 1/4" magnetic storage handle |          |        |       |      |          |        |



SECURE-BOLT® SLEEVE ANCHORS

TORX® EQUIVALENT 6-LOBE WITH PIN TAMPER  
RESISTANT DRIVE

The Secure-Bolt® Sleeve Anchor provides maximum security in concrete, block, brick and stone base materials.



**FLAT HEAD** (countersunk head)

| SKU                              | DIAMETER  | DRIVER SIZE | Box Qty |
|----------------------------------|-----------|-------------|---------|
| STAINLESS STEEL POST & ZINC BODY |           |             |         |
| 37N400AFS                        | 3/8" x 4" | 45TXH       | 50      |
| 37N500AFS                        | 3/8" x 5" | 45TXH       | 25      |
| 37N600AFS                        | 3/8" x 6" | 45TXH       | 25      |
| STAINLESS STEEL POST & BODY      |           |             |         |
| 37N400AFSS                       | 3/8" x 4" | 45TXH       | 50      |
| 37N500AFSS                       | 3/8" x 5" | 45TXH       | 25      |
| 37N600AFSS                       | 3/8" x 6" | 45TXH       | 25      |

“Super simple to order and very fast shipping”

★★★★★

Trustpilot

SECURE-BOLT PLUS CONCRETE  
SCREW ANCHORS

The Secure-Bolt Plus is a one-piece, heat treated heavy-duty screw anchor manufactured from carbon steel. It is designed to work for most applications and can be used in a variety of tough base materials such as concrete, block, brick or stone.

The Secure-Bolt Plus Screw Anchor replaces the Secure Wedge-Bolt with a new and improved design.



- ☐ Exceeds 700 hours before any red corrosion appears (ASTM-B-117) NOA 18.1126-2 approved
- ☐ Multiple coating protection, composed of a layer of zinc plating and 2 layers of epoxy organic coating
- ☐ Suitable for external environments ISO 9223 class C3 for a period (service life) exceeding 25 years

SECURE-BOLT PLUS SCREW ANCHOR

|        | SKU        | DESCRIPTION | DIA. | ANSI DRILL DIAMETER | MIN. EMBED | MAX. TORQUE | BOX QTY |
|--------|------------|-------------|------|---------------------|------------|-------------|---------|
|        |            |             |      |                     |            |             |         |
| BUTTON | 37N300ABSP | 3/8" x 3"   | 3/8" | 3/8"                | 2-1/2"     | 35 ft lbs   | 50      |
|        | 37N400ABSP | 3/8" x 4"   | 3/8" | 3/8"                | 2-1/2"     | 35 ft lbs   | 50      |
|        | 50N300ABSP | 1/2" x 3"   | 1/2" | 1/2"                | 2-3/4"     | 45 ft lbs   | 50      |
| FLAT   | 37N300AFSP | 3/8" x 3"   | 3/8" | 3/8"                | 2-1/2"     | 35 ft lbs   | 50      |
|        | 37N400AFSP | 3/8" x 4"   | 3/8" | 3/8"                | 2-1/2"     | 35 ft lbs   | 50      |

TAMPER-RESISTANT

ARCHITECTURAL SERIES SEX BOLTS

Used mainly to install hardware (kick plates, panic bars, door closers, hinges) to doors. For use with door **thickness of 1-3/4"** Available in steel, aluminum, 18-8 Stainless Steel. Sold by the set, one female sex bolt and one male flat head Phillips screw.



| SKU        | BARREL DIA. | BARREL LENGTH | THREAD SIZE | THREAD DEPTH | HEAD DIA. | HEAD HEIGHT | MATING SCREW | MATERIAL             | PLATING | BOX QTY |
|------------|-------------|---------------|-------------|--------------|-----------|-------------|--------------|----------------------|---------|---------|
| 37N156SASZ | 3/8"        | 1-9/16"       | 1/4"-20     | 1"           | 9/16"     | 5/32"       | 1/4"-20 x 1" | Steel                | Zinc    | 25      |
| 37N156SASS | 3/8"        | 1-9/16"       | 1/4"-20     | 3/4"         | 9/16"     | 5/32"       | 1/4"-20 x 1" | 18.8 Stainless Steel | —       | 25      |
| 37N156SASA | 3/8"        | 1-9/16"       | 1/4"-20     | 1"           | 9/16"     | 1/8"        | 1/4"-20 x 1" | Aluminum             | —       | 25      |

FLAT PHILLIPS HEAD SCREWS

Head height of undercut screws is approximately 2/3 that of standard screws. Drive depths are reduced proportionately.

UNDERCUT MACHINE SCREWS STEEL, ZINC PLATED

| SKU        | SIZE          | BOX QTY. | SKU        | SIZE          | BOX QTY. |
|------------|---------------|----------|------------|---------------|----------|
| 8C50MFUPZ  | #8-32 x 1/2"  | 100      | 12C50MFUPZ | #12-24 x 1/2" | 100      |
| 10C50MFUPZ | #10-24 x 1/2" | 100      | 12C75MFUPZ | #12-24 x 3/4" | 100      |



TYPE F THREAD CUTTING STEEL, ZINC PLATED

A thread cutting screw is a screw with machine screw thread pitch, blunt point, tapered entering threads and multiple cutting edges. Used in heavy gauge sheet metal, aluminum, zinc and lead die castings, cast iron, brass and plastic.

| SKU        | SIZE          | BOX QTY. | SKU        | SIZE           | BOX QTY. |
|------------|---------------|----------|------------|----------------|----------|
| 10C50FFUPZ | #10-24 x 1/2" | 500      | 12C75FFUPZ | #12-24 x 3/4"  | 500      |
| 10F50FFUPZ | #10-32 x 1/2" | 500      | 25C50FFUPZ | 1/4"-20 x 1/2" | 500      |
| 12C50FFUPZ | #12-24 x 1/2" | 500      |            |                |          |



## DEWALT

### DEW DW088CG

#### Green Line Laser Level & 100 Ft. Laser Distance Measurer

- Green beam for enhanced visibility & range
- Full Time pulse mode for use with a detector
- Integrated magnetic bracket
- 1/4 in. 20-thread mount (for Tripod use)



|               |                         |                                                                                                      |
|---------------|-------------------------|------------------------------------------------------------------------------------------------------|
| Accuracy      | +/- 1/8" accuracy @ 30' | Includes<br>Ceiling Bracket, AA & AAA Batteries, TSTAK® compatible case, DW099E, Enhancement glasses |
| Battery Type  | AA Batteries            |                                                                                                      |
| IP Rating     | IP54                    |                                                                                                      |
| Visible Range | 150 ft                  |                                                                                                      |



### DEW DW089LG

#### 12V MAX\* 3 x 360 Green Line Laser

- Integrated magnetic bracket with 1/4" & 5/8" thread
- Full-time pulse mode allows use with detector, maintains full brightness for visibility, and extends range
- Overmolded housing & IP65 debris/water resistance

|                  |                  |                                                                                                                         |
|------------------|------------------|-------------------------------------------------------------------------------------------------------------------------|
| Accuracy         | +/-0.125 in      | Includes<br>Blow Mold Case, Extended Ceiling Bracket<br>12v Battery, Charger, Target Card,<br>Laser Enhancement Glasses |
| Battery Needs    | 12 V             |                                                                                                                         |
| IP Rating        | IP54             |                                                                                                                         |
| Net Height/Width | 12.5 lbs./17.75" |                                                                                                                         |
| Visible Range    | 100 ft Width     |                                                                                                                         |
| Working Range    | 165 ft           |                                                                                                                         |



### DEW D25263K

#### 1-1/8" D-Handle SDS Hammer Kit

- 3.0 joules impact energy for fast drilling and chipping speed
- 8.5 amp high performance motor
- SHOCKS - Active Vibration Control reduces vibration felt by the user at the handles.

|                           |                |                                                  |
|---------------------------|----------------|--------------------------------------------------|
| Impact Energy             | 3.0 Joules     | Includes<br>360° Side Handle, Depth Rod, Kit Box |
| No Load Speed             | 0-1450 RPM     |                                                  |
| AMPS                      | 8.5            |                                                  |
| Blows/Min                 | 0-5,350 bpm    |                                                  |
| Optimal Concrete Drilling | 1/4 - 3/4 in   |                                                  |
| Net Weight/Length         | 6.8 lbs./17.5" |                                                  |

### DEW DCK2100P2

- 20V MAX\* Brushless Cordless 2-Tool Kit Including Hammer Drill/Driver
- The DCD999 gets up to 2% morepower\*\* when paired with FLEXVOLT® batteries (sold separately).
- The DCF887 has application versatility with 3-speed settings



|                 |          |                                                                                                                                                  |
|-----------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Tool Type | Cordless | Includes<br>Brushless DCD999B Hammer Drill/Driver &<br>DCF887 Impact Driver, (2) DCB205 Batteries,<br>DCB118 8 Amp Charger, Belt Hooks & Kit Bag |
| System          | 20V MAX* |                                                                                                                                                  |
| Amp Hour        | 5 AH     |                                                                                                                                                  |



### DEW DCF622M2

#### 20V Max\* XR® Versa-Clutch™ Adjustable Torque Screwgun Kit

- Brushless motor increases efficiency and runtime.
- Versa-Clutch™ System helps prevent damage to material & fasteners
- LED light illuminates dark work areas

|                   |                        |                                                                                           |
|-------------------|------------------------|-------------------------------------------------------------------------------------------|
| No Load Speed     | 0-2000 RPM             | Includes<br>DCF622 - 20V MAX*, (2) 4.0 Ah Batteries,<br>Fast Charger, Belt Hook, Tool Bag |
| Clutch Type       | VERSA -Clutch          |                                                                                           |
| Drive             | 1/4" Quick Release Hex |                                                                                           |
| Max Fastener Size | #14                    |                                                                                           |
| Net Weight/Length | 2.8 lbs./9.25"         |                                                                                           |



### DEW DCF887M2

#### 20V MAX\* XR® 1/4" 3-Speed Impact Driver Kit (4.0 AH)

- Brushless motor and XR® Li-Ion batteries deliver more run time and capacity over standard units
- Precision drive in speed 1 for precision applications and added control
- 3-speed settings for optimized application versatility
- Three LED lights make it ideal in dark spaces.

|               |                          |                                                              |
|---------------|--------------------------|--------------------------------------------------------------|
| No Load Speed | 0-1,000/2,800/ 3,250 RPM | Includes<br>(2) 4.0 Ah Batteries, Fast<br>Charger, Belt Hook |
| Max Torque    | 1825 (in-lbs)            |                                                              |
| Impacts/Min   | 3600 IPM                 |                                                              |
| Tool Length   | 5.3 in                   |                                                              |

## SHIMS

All a shim does is take up space. That space, levels or aligns your work, or positions objects until permanent support can be installed. Shims are used in a variety of industries. A large range are available to meet those needs with different shapes & load-bearing properties.

### HORSESHOE SHIMS

| SKU          | SIZE    | THICKNESS | COLOR | BOX QTY |
|--------------|---------|-----------|-------|---------|
| SHIM HSS51HS | 3" x 4" | 1/32"     | Green | 1000    |
| SHIM HSS56HS | 3" x 4" | 1/16"     | Blue  | 1000    |
| SHIM HSS58HS | 3" x 4" | 1/8"      | Red   | 1000    |
| SHIM HSS54HS | 3" x 4" | 1/4"      | Black | 500     |
| SHIM HSS53HS | 3" x 4" | 3/8"      | White | 360     |
| SHIM HSS52HS | 3" x 4" | 1/2"      | Brown | 250     |
| SHIM HSS55HS | 3" x 4" | 5/8"      | Grape | 225     |
| SHIM HSS57HS | 3" x 4" | 3/4"      | Cyan  | 200     |



### U SHIMS


| SKU           | SIZE            | THICKNESS | COLOR | BOX QTY |
|---------------|-----------------|-----------|-------|---------|
| SHIM US16HS   | 1-1/2" x 2"     | 1/16"     | Blue  | 1000    |
| SHIM US18HS   | 1-1/2" x 2"     | 1/8"      | Red   | 1000    |
| SHIM US14HS   | 1-1/2" x 2"     | 1/4"      | Black | 1000    |
| SHIM US36HS   | 1-1/2" x 3-1/2" | 1/16"     | Blue  | 1000    |
| SHIM US38HS   | 1-1/2" x 3-1/2" | 1/8"      | Red   | 1000    |
| SHIM US34HS   | 1-1/2" x 3-1/2" | 1/4"      | Black | 1000    |
| SHIM US33HS   | 1-1/2" x 3-1/2" | 3/8"      | White | 500     |
| SHIM US32HS   | 1-1/2" x 3-1/2" | 1/2"      | Brown | 500     |
| SHIM US17-6HS | 1-7/8" x 2-5/8" | 1/16"     | Blue  | 1000    |
| SHIM US17-8HS | 1-7/8" x 2-5/8" | 1/8"      | Red   | 1000    |
| SHIM US17-4HS | 1-7/8" x 2-5/8" | 1/4"      | Black | 1000    |
| SHIM US26HS   | 2-5/16" x 3"    | 1/16"     | Blue  | 1000    |
| SHIM US28HS   | 2-5/16" x 3"    | 1/8"      | Red   | 1000    |
| SHIM US24HS   | 2-5/16" x 3"    | 1/4"      | Black | 1000    |
| SHIM US23HS   | 2-5/16" x 3"    | 3/8"      | White | 500     |



1-1/2" x 2" and 1-1/2" x 3-1/2" - 1/2" bolt holes, 1-7/8 x 2-5/8" - 5/8" bolt holes, 2-5/16" - 13/16" bolt holes

### KEYSLOT SHIMS


| SKU            | SIZE        | THICKNESS | COLOR | BOX QTY |
|----------------|-------------|-----------|-------|---------|
| SHIM KS335-6KS | 3" x 3-1/2" | 1/16"     | Blue  | 1000    |
| SHIM KS335-8KS | 3" x 3-1/2" | 1/8"      | Red   | 1000    |
| SHIM KS335-4KS | 3" x 3-1/2" | 1/4"      | Black | 500     |



7/16" bolt holes


### FLAT PLATE SHIMS

| SKU            | SIZE    | THICKNESS | BOX SIZE | SKU            | SIZE    | THICKNESS | BOX SIZE |
|----------------|---------|-----------|----------|----------------|---------|-----------|----------|
| SHIM FPS16X2X2 | 2" x 2" | 1/16"     | 2400     | SHIM FPS8X2X2  | 2" x 2" | 1/8"      | 2400     |
| SHIM FPS4X2X2  | 2" x 2" | 1/4"      | 1600     | SHIM FPS3X2X2  | 2" x 2" | 3/8"      | 1000     |
| SHIM FPS16X2X4 | 2" x 4" | 1/16"     | 1200     | SHIM FPS8X2X4  | 2" x 4" | 1/8"      | 1200     |
| SHIM FPS4X2X4  | 2" x 4" | 1/4"      | 720      | SHIM FPS3X2X4  | 2" x 4" | 3/8"      | 500      |
| SHIM FPS16X3X3 | 3" x 3" | 1/16"     | 2000     | SHIM FPS8X3X3  | 3" x 3" | 1/8"      | 1400     |
| SHIM FPS4X3X3  | 3" x 3" | 1/4"      | 700      | SHIM FPS3X3X3  | 3" x 3" | 3/8"      | 250      |
| SHIM FPS2X3X3  | 3" x 3" | 1/2"      | 370      | SHIM FPS16X4X4 | 4" x 4" | 1/16"     | 1600     |
| SHIM FPS8X4X4  | 4" x 4" | 1/8"      | 800      | SHIM FPS4X4X4  | 4" x 4" | 1/4"      | 400      |
| SHIM FPS3X4X4  | 4" x 4" | 3/8"      | 250      | SHIM FPS2X4X4  | 4" x 4" | 1/2"      | 200      |
| SHIM FPS16X8X8 | 8" x 8" | 1/16"     | 250      | SHIM FPS8X8X8  | 8" x 8" | 1/8"      | 150      |
| SHIM FPS4X8X8  | 8" x 8" | 1/4"      | 80       |                |         |           |          |




### RUGGED CONSTRUCTION SHIMS

| SKU           | SIZE    | THICKNESS | BOX SIZE | SKU          | SIZE    | THICKNESS | BOX SIZE |
|---------------|---------|-----------|----------|--------------|---------|-----------|----------|
| SHIM CS2X6-16 | 2" x 6" | 1/16"     | 1600     | SHIM CS2X6-8 | 2" x 6" | 1/8"      | 900      |
| SHIM CS2X6-4  | 2" x 6" | 1/4"      | 475      | SHIM CS4X6-6 | 4" x 6" | 1/16"     | 1000     |
| SHIM CS4X6-8  | 4" x 6" | 1/8"      | 500      | SHIM CS4X6-4 | 4" x 6" | 1/4"      | 250      |
| SHIM CS4X6-3  | 4" x 6" | 3/8"      | 180      | SHIM CS4X6-2 | 4" x 6" | 1/2"      | 120      |
| SHIM CS6X6-16 | 6" x 6" | 1/16"     | 600      | SHIM CS6X6-8 | 6" x 6" | 1/8"      | 350      |
| SHIM CS6X6-4  | 6" x 6" | 1/4"      | 180      |              |         |           |          |



### WEDGE SHIMS

|                                   | SKU       | SIZE             | THICKNESS     | COLOR | BOX QTY |
|-----------------------------------|-----------|------------------|---------------|-------|---------|
| Tapered Wedge                     | SHIM TW3  | 1-1/2" x 3-3/8"  | 1/32" to 1/4" | Black | 1000    |
| Sectional Tapered Wedge           | SHIM TW6  | 1-1/2" x 6"      | 1/32" to 3/8" | Black | 600     |
| Graduated Sectional Tapered Wedge | SHIM TW8  | 1-1/2" x 8"      | 1/16" to 1/4" | Black | 1000    |
| Snap-Apart Wedge                  | SHIM SATW | 1-7/16" x 3-3/4" | 1/4" to 1/16" | White | 1000    |



### STACK SHIMS

| SKU         | SIZE            | THICKNESS | COLOR         | BOX QTY |
|-------------|-----------------|-----------|---------------|---------|
| SHIM MS8U   | 1-7/8" x 3-1/8" | 1/32"     | 1/4" Mini     | 2000    |
| SHIM SS8U   | 1-7/8" x 3-1/8" | 1/16"     | 1/2" Short    | 2000    |
| SHIM RS16U  | 1-7/8" x 3-5/8" | 1/16"     | 1" Regular    | 2000    |
| SHIM XLS16U | 1-7/8" x 4-1/8" | 1/16"     | 1" Xtra Large | 2000    |
| SHIM GL16LU | 1-7/8" x 5-7/8" | 1/16"     | 1" Giant      | 2000    |



## MOR CSM7NXTB

### 7" NXT METAL CUTTING CIRCULAR SAW W/FREE BLADE

Metal Devil® metal cutting circular saws have a sturdy, heavy-duty feel as they cut through metal smoothly and with minimum effort. Built with a unique motor design that maintains torque and operates at the optimum RPM as blade moves through steel, thin steel, aluminum and stainless steel.

- Sure grip ergonomically designed handles help steady saw while cutting
- Quick Release Metal Chip Collection collects virtually all chips
- Upper chamber minimizes sparks & deadens sound
- Guide arrows & sight opening for easier blade position - beveled (0-45°)
- 7" & 9" saw cuts edges w/laser line cutting guide- batteries not required

| SPECIFICATIONS     |           | Includes                                                    |
|--------------------|-----------|-------------------------------------------------------------|
| Max. Cutting Depth | 2-3/8"    | NXT Blade, Wrench, Safety Goggles, Ear Plugs, Carrying Case |
| No Load Speed      | 3800 RPM  |                                                             |
| AMPS               | 13        |                                                             |
| Watts              | 1560      |                                                             |
| Cord Length        | 7'        |                                                             |
| Arbor Diameter     | 20 mm     |                                                             |
| Net Weight         | 18.0 lbs. |                                                             |



Metal Devil NXT™



## MOR CSM7254820FSC

### 7" NXT METAL CUTTING CIRCULAR BLADE

- Combines strength, long life, and technology in one complete package.
- Manufacturing processes combine plate technology and carbide science resulting in premium cutting performance in demanding applications

| SKU           | BLADE DIA. | NO. OF TEETH | ARBOR | APPLICATIONS |
|---------------|------------|--------------|-------|--------------|
| CSM7254820FSC | 7"         | 40           | 20mm  | Steel        |



## LENOX BI-METAL RECIPROCATING SAW BLADES

### POWER BLAST TECHNOLOGY™ INCREASES BLADE LIFE

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durability

| SKU 50/PACK      | LENGTH | WIDTH | THICKNESS | TPI |
|------------------|--------|-------|-----------|-----|
| LEN 22756OSB614R | 6"     | 3/4"  | 0.035"    | 14  |
| LEN 22757OSB618R | 6"     | 3/4"  | 0.035"    | 18  |
| LEN 22757OSB624R | 6"     | 3/4"  | 0.035"    | 24  |

## BI-METAL JIG SAW BLADES

- Used primarily for cutting ferrous and non-ferrous metals.
- Hard, durable high speed tooth points electron beam welded to spring steel backer for toughness and stability during cutting.

| SKU            | LENGTH | WIDTH | THICKNESS | TPI | APPLICATIONS                    |
|----------------|--------|-------|-----------|-----|---------------------------------|
| <b>T-Shank</b> |        |       |           |     |                                 |
| LEN 1991561    | 3-5/8" | 3/8"  | .037"     | 14  | Thick metal cutting >3/32"      |
| LEN 1991567    | 3-5/8" | 3/8"  | .037"     | 18  | Medium metal cutting 1/16"-1/4" |
| LEN 1991573    | 3-5/8" | 3/8"  | .037"     | 24  | Thin metal cutting <1/8"        |
| <b>U-Shank</b> |        |       |           |     |                                 |
| LEN 1991564    | 3-5/8" | 3/8"  | .037"     | 14  | Thick metal cutting >3/32"      |
| LEN 1991570    | 3-5/8" | 3/8"  | .050"     | 18  | Medium metal cutting 1/16"-1/4" |
| LEN 1991576    | 3-5/8" | 3/8"  | .037"     | 24  | Thin metal cutting <1/8"        |

## STEP DRILL KIT 4 PC.



| SKU          | CONTAINS                   |
|--------------|----------------------------|
| MOR ESDKIT01 | ESD01, ESD03, ESD04, ESD05 |



## BI-METAL SPEED SLOT® HOLE SAW WITH T3 TECHNOLOGY™

Increased wall thickness improves durability and minimizes tooth loss  
Optimized tooth design penetrates metal with ease.

| SKU          | DIA.    | PIPE TAPS | PIP ENT. | SKU          | DIA.   | PIPE TAPS | PIP ENT. |
|--------------|---------|-----------|----------|--------------|--------|-----------|----------|
| LEN 3001414L | 7/8"    | 3/4"      | 1/2"     | LEN 3002828L | 1-3/4" | 1-1/2"    | 1-1/4"   |
| LEN 3001616L | 1"      | —         | —        | LEN 3003232L | 2"     | —         | 1-1/2"   |
| LEN 3001818L | 1-1/8"  | 1"        | 3/4"     | LEN 3003434L | 2-1/8" | —         | —        |
| LEN 3002929L | 1-3/16" | —         | —        | LEN 3003636L | 2-1/4" | 2"        | —        |
| LEN 3002020L | 1-1/4"  | —         | —        | LEN 3003838L | 2-3/8" | —         | —        |
| LEN 3002222L | 1-3/8"  | —         | 1"       | LEN 3004040L | 2-1/2" | —         | 2"       |
| LEN 3002424L | 1-1/2"  | 1-1/4"    | —        |              |        |           |          |



**XLT TAPPER**

**TAP MORE HOLES • SAVE MORE TIME**  
**• CREATE PRECISE THREADS**

Champion Cutting Tool's Brute Platinum XLT Tapper was designed to increase tapping productivity when threading large amounts of holes in ferrous and non-ferrous metals. Outperforming the traditional way of tapping, the XLT Tapper taps holes 10X faster than handheld tapping using a tap wrench. The XLT Tapper is the perfect tool for various industries including architectural metal and glass, steel fabrication, elevator maintenance, automotive, MRO and more!

- Adjustable depth-stop controls threading depth
- When finished tapping, pull back to activate auto reverse
- Pivoting tap collet for trouble-free tap alignment
- Spindle clutch for safer jam-free tapping

Specifically engineered for heavy duty applications on site or in the shop, the XLT Tapper can tap steel/ferrous materials from #10 up to 9/16" (14mm) and aluminum/non-ferrous materials from #10 up to 5/8" (16mm). High tech features such as auto reverse, speed control, and pivoting tap collet reduce tap breakage saving you time and money on the job. With the operator in mind, the XLT Tapper is easy to use and lightweight, featuring a depth-stop to control threading depth, and includes a spindle clutch for safer jam-free tapping. For optimal performance, Brute Platinum XL22 Spiral Point Taps and BruteLube Cutting Fluid are recommended for fast and easy tapping.

| SKU     | CUTTER CAPACITY                                                                                        | INCLUDES                                                                             |
|---------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| CHA XLT | Steel: #10 up to 9/16" (14mm)<br>Aluminum: #10 up to 5/8" (16mm)<br>Motor: 450W<br>Net Weight: 6.0 lbs | Tapper, Side Handle, Depth Gauge,<br>4mm Hex Key, Operating Manual,<br>Carrying Case |

**CUTTING FLUID & WAX**

**FOR TOP PERFORMANCE, USE WITH THE XLT TAPPER**

Multipurpose cutting and tapping fluid and wax, is formulated to extend tool life, reduce chip welding and clings to the tool at any angle, including overhead operations. Continuous shield against friction and heat, reducing tool costs and work piece scrap. Provides a close tolerance precision finish. Effective on stainless steel, aluminum, and exotic alloys.



| SKU             | Description    | SKU               | Description  |
|-----------------|----------------|-------------------|--------------|
| CHA XLUB-4      | 4 oz. Fluid    | CHA XLUB16        | 16 oz. Fluid |
| CHA XLUB-128    | 1 gallon Fluid | CHA XLUB-WAX-2    | 2 oz. Wax    |
| CHA XLUB-WAX-16 | 16 oz. Wax     | CHA XLUB-STICK-16 | 16 oz. Wax   |



**XL22 SPIRAL POINT TAPS**

**FOR TOP PERFORMANCE, USE WITH THE XLT TAPPER**

A powerhouse tool on its own, the XL22 tap can now maximize threading productivity with the help of the XLT Tapper. The XLT Tapper's high tech features were specifically engineered to eliminate operator error often experienced when hand tapping. With the Brute Tap System, you will thread the perfect hole every time! The Brute Platinum® XL22 is a three flute, plug style, heavy duty, surfaced treated tap, with a necked shank made from special steel.

| SKU            | SKU              | SKU              | SKU             |
|----------------|------------------|------------------|-----------------|
| CHA XL22-4-40  | CHA XL22-12-24   | CHA XL22-3/8-16  | CHA XL22-1/2-20 |
| CHA XL22-6-32  | CHA XL22-1/4-20  | CHA XL22-3/8-24  | CHA XL22-5/8-11 |
| CHA XL22-8-32  | CHA XL22-1/4-28  | CHA XL22-7/16-14 | CHA XL22-5/8-18 |
| CHA XL22-10-24 | CHA XL22-5/16-18 | CHA XL22-7/16-20 | CHA XL22-3/4-10 |
| CHA XL22-10-32 | CHA XL22-5/16-24 | CHA XL22-1/2-13  | CHA XL22-3/4-16 |



**XSR STEP REAMERS**

Step Drills are great tools for cutting thin metal, but they are limited in capacity when it comes to other industrial applications. The Brute XSR STEP REAMER is a solution oriented high-performance tool that solves this problem. It is a HEAVY DUTY hybrid between a STEP DRILL and a REAMER, allowing the operator to enlarge and align holes in steel up to 1/2" thick. The XSR is ideal for cutting bolt hole sizes for a variety of industries. Users will appreciate and value the convenience of having 5 drill sizes per tool- optimizing productivity on their job.

| SKU                   | Includes                                                                                                                                       |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| CHA XSR-5/16 X 9/16   | 5 Steps: 5/16", 3/8", 7/16", 1/2" & 9/16", 2 Flute Design, Flute Length: 2-3/4", Overall Length: 4-1/2", 90° Drill Point, Safety Collar Stop   |
| CHA XSR-9/16 X 13/16  | 5 Steps : 9/16", 5/8", 11/16", 3/4", 13/16", 2 Flute Design, Flute Length: 2-3/4", Overall Length: 4-1/2", 90° Drill Point, Safety Collar Stop |
| CHAXSR-13/16 X 1-1/16 | 5 Steps: 13/16", 7/8", 15/16", 1", 1-1/16", 2 Flute Design, Flute Length: 2-3/4", Overall Length: 4-5/8", 90° Drill Point, Safety Collar Stop  |
| CHA XSR-SET           | 3 Piece Brute Platinum XSR Step Reamer Set, Includes: XSR- 5/16" - 9/16", XSR-9/16" - 13/16", XSR-13/16" - 1-1/16                              |

## INDUSTRIAL TWIST / DRILLS DRILL & TAP

### XL5 JOBBER LENGTH TWIST DRILLS

#### FRACTIONAL & NUMERICAL SIZES

Brute Platinum® XL5 jobber length drills have a 135° split point and are an exclusive combination of premium high speed steel and superior geometry.



| SKU           | FLUTE LENGTH | OVERALL LENGTH | SKU           | FLUTE LENGTH | OVERALL LENGTH |
|---------------|--------------|----------------|---------------|--------------|----------------|
| CHA XL5-1/16  | 7/8"         | 1-7/8"         | CHA XL5-5/16  | 3-3/16"      | 4-1/2"         |
| CHA XL5-5/64  | 1"           | 2"             | CHA XL5-21/64 | 3-5/16"      | 4-5/8"         |
| CHA XL5-3/32  | 1-1/4"       | 2-1/4"         | CHA XL5-11/32 | 3-7/16"      | 4-3/4"         |
| CHA XL5-7/64  | 1-1/2"       | 2-5/8"         | CHA XL5-23/64 | 3-1/2"       | 4-7/8"         |
| CHA XL5-1/8   | 1-5/8"       | 2-3/4"         | CHA XL5-3/8   | 3-5/8"       | 5"             |
| CHA XL5-9/64  | 1-3/4"       | 2-7/8"         | CHA XL5-25/64 | 3-3/4"       | 5-1/8"         |
| CHA XL5-5/32  | 2"           | 3-1/8"         | CHA XL5-13/32 | 3-7/8"       | 5-1/4"         |
| CHA XL5-11/64 | 2-1/8"       | 3-1/4"         | CHA XL5-27/64 | 3-15/16"     | 5-3/8"         |
| CHA XL5-3/16  | 2-5/16"      | 3-1/2"         | CHA XL5-7/16  | 4-1/16"      | 5-1/2"         |
| CHA XL5-13/64 | 2-7/16"      | 3-5/8"         | CHA XL5-1/2   | 4-1/2"       | 6"             |
| CHA XL5-7/32  | 2-1/2"       | 3-3/4"         | CHA XL5-7     | 2-7/16"      | 3-5/8"         |
| CHA XL5-15/64 | 2-5/8"       | 3-7/8"         | CHA XL5-16    | 2-3/16"      | 3-3/8"         |
| CHA XL5-1/4   | 2-3/4"       | 4"             | CHA XL5-21    | 2-1/8"       | 3-1/4"         |
| CHA XL5-17/64 | 2-7/8"       | 4-1/8"         | CHA XL5-25    | 1-7/8"       | 3"             |
| CHA XL5-9/32  | 2-15/16"     | 4-1/4"         | CHA XL5-29    | 1-3/4"       | 2-7/8"         |
| CHA XL5-19/64 | 3-1/16"      | 4-3/8"         | CHA XL5-30    | 1-5/8"       | 2-3/4"         |

Fractional sizes: 12 per package through 9/32", 6 per package: 19/64" through 1/2", Numerical sizes: 12 per package



### 29 PC. TWISTER SET 1/16 T01/2 X 64THS

| SKU             | Description                       |
|-----------------|-----------------------------------|
| CHA TWISTER-XL5 | XL5 Brute Platinum® Jobber Drills |



### DT22HEX

Champion DT22 Hex Drill & Tap combo with a hex shank creates holes and taps in a single operation. No center drilling or punching is required.

- Champion's exclusive taper neck design significantly reduces breakage.
- 135° helical point permits holes and threads to be cut at high speeds.
- Superior strength & durability provided by high molybdenum, high speed steel

| SKU                | HEX SHANK | DRILL DIA. | DRILL LENGTH | OVERALL LENGTH | THREAD LENGTH |
|--------------------|-----------|------------|--------------|----------------|---------------|
| CHA DT22HEX-6-32   | 1/4"      | 7/64"      | 0.31"        | 2.17"          | 7/16"         |
| CHA DT22HEX-8-32   | 1/4"      | #29        | 3/8"         | 2.45"          | 1/2"          |
| CHA DT22HEX-10-24  | 1/4"      | #25        | 3/8"         | 2.61"          | 5/8"          |
| CHA DT22HEX-10-32  | 1/4"      | #21        | 3/8"         | 2.61"          | 5/8"          |
| CHA DT22HEX-12-24  | 1/4"      | #17        | 0.47"        | 2.70"          | 11/16"        |
| CHA DT22HEX-1/4-20 | 1/4"      | #6         | 0.53"        | 2.89"          | 3/4"          |

### 321 SPIRAL POINT TAPS

Champion Spiral Point Taps are commonly referred to as "gun" taps. Spiral point taps cut with a shearing action that "shoots" the chip ahead of the tap. Supplied in standard "H" limits and the most common plug style.

- Shallow straight flutes for a sturdy rigid design, minimizing tap breakage.
- Engineered specifically for tapping of "through holes" or deep blind holes where a shoulder exists for chips to collect

| SKU           | SKU            |
|---------------|----------------|
| CHA 321-6-32  | CHA 321-10-32  |
| CHA 321-8-32  | CHA 321-12-24  |
| CHA 321-10-24 | CHA 321-1/4-20 |



### 308 HIGH SPEED TAPS

308 High Speed Hand Taps perform consistently in production set-ups and are designed for general purpose tapping in a variety of materials. They are supplied in standard "H" limits that will provide an adequate "class of fit" for standard tapping applications.

- Manufactured with form relieved threads that reduce friction and wear.
- Cut smoothly and thread more holes per tap set-up.
- P (Plug) - most commonly used, distributes load across 3-5 threads of chamfer Plug - 3 to 5 pitches



| SKU             | SKU              |
|-----------------|------------------|
| CHA 308-6-32-P  | CHA 308-10-32-P  |
| CHA 308-8-32-P  | CHA 308-12-24-P  |
| CHA 308-10-24-P | CHA 308-1/4-20-P |

#### Plug - 3 to 5 pitches

The most common chamfer for use by hand or machine in through or blind holes This chamfer is more efficient



## CARBIDE TIPPED HOLE CUTTERS

### CT3

The solution for drilling holes in sheet metal up to 1/8" thick.

| SKU            | SKU                                         | SKU            |
|----------------|---------------------------------------------|----------------|
| CHA CT3-5/8    | CHA CT3-15/16                               | CHA CT3-1-3/16 |
| CHA CT3-11/16  | CHA CT3-1                                   | CHA CT3-1-1/4  |
| CHA CT3-3/4    | CHA CT3-1-1/16                              | CHA CT3-1-5/16 |
| CHA CT3-13/16  | CHA CT3-1-1/8                               | CHA CT3-1-3/8  |
| CHA CT3-7/8    |                                             |                |
| SKU            | Includes                                    |                |
| CHA CT3P-SET-1 | 1 each 5/8", 3/4", 7/8", 1", 1-1/8" and QCD |                |



### CT5

The cutting tool for ferrous/non-ferrous materials up to 3/16" thick.

| SKU                | SKU                                                     | SKU           |
|--------------------|---------------------------------------------------------|---------------|
| CHA CT5-7/8        | CHA CT5-1-1/4                                           | CHA CT5-1-3/4 |
| CHA CT5-15/16      | CHA CT5-1-3/8                                           | CHA CT5-2     |
| CHA CT5-1          | CHA CT5-1-1/2                                           | CHA CT5-2-1/8 |
| CHA CT5-1-1/8      | CHA CT5-1-5/8                                           |               |
| SKU                | Includes                                                |               |
| CHA CT5P-CONDUIT-1 | 1 ea. 7/8", 1-1/8", 1-7/32", 1-3/8", 1-3/4", 2", 2-1/2" |               |



### CT7

The solution for drilling holes in steel up to 1" thick.

| SKU            | SKU                                                       | SKU           |
|----------------|-----------------------------------------------------------|---------------|
| CHA CT7-7/8    | CHA CT7-1-1/4                                             | CHA CT7-1-3/4 |
| CHA CT7-15/16  | CHA CT7-1-3/8                                             | CHA CT7-2     |
| CHA CT7-1      | CHA CT7-1-1/2                                             | CHA CT7-2-1/8 |
| CHA CT7-1-1/8  | CHA CT7-1-5/8                                             |               |
| SKU            | Includes                                                  |               |
| CHA CT7P-SET-4 | General Maintenance - 1 each 5/8", 3/4", 7/8", 1", 1-1/8" |               |



All CT5 and CT7; = \* 3/8" shank, \*\*=1/2" shank

### CT9 SET

Up to 2" Thick Steel

| SKU               | Includes                                              |
|-------------------|-------------------------------------------------------|
| CHA CT9P-DOOR-SET | 1 each 7/8", 1"- CT7, and 1 each 1-1/2", 2-1/8" - CT9 |



## COUNTERSINKS - ZERO FLUTE-CSK

Champion Zero Flute Countersinks are the high performance solution for smooth, chatterless finish in metal, plastic or wood. The single cutting edge is free cutting and provides fast stock removal. They are especially popular for aluminum frame storefront installation, glass and window design industry, and architectural metalwork.

- 1/4" hex shank is specifically for quick-change use in portable drilling
- Free-cutting - easily sharpened

### 1/4" HEX SHANK

| SKU          | SCREW SIZE      | SHANK DIA. | OVERALL LENGTH | BODY DIA. |
|--------------|-----------------|------------|----------------|-----------|
| CHA CSK-3SH  | Nos. 2, 3, 4    | Hex        | 1-27/32"       | 1/4"      |
| CHA CSK-8SH  | Nos. 5, 6, 8    | Hex        | 2"             | 11/32"    |
| CHA CSK-18SH | Nos. 10, 12, 14 | Hex        | 2-5/16"        | 9/16"     |



### 82° PILOTLESS ROUND SHANK

| SKU        | DIA. OF CUT      | SHANK DIA. | OVERALL LENGTH | BODY DIA. |
|------------|------------------|------------|----------------|-----------|
| CHA CSK3S  | .073 to 15/64"   | 1/4"       | 1-3/4"         | 1/4"      |
| CHA CSK18  | 3/16" to 17/32"  | 1/4"       | 1-7/8"         | 9/16"     |
| CHA CSK26  | .307 to 25/32"   | 1/2"       | 2-5/8"         | 13/16"    |
| CHA CSK36  | .431 to 7/8"     | 1/4"       | 2-13/16"       | 1-1/8"    |
| CHA CSK48  | 1/2" to 1-15/32" | 1/4"       | 3-1/2"         | 1-1/2"    |
| SKU        | DIA. OF CUT      | SHANK DIA. | OVERALL LENGTH | BODY DIA. |
| CHA CSK5S  | #4, #5           | 1/4"       | 1-1/2"         | 1-17/16"  |
| CHA CSK6S  | #6               | 1/4"       | 1-1/2"         | 19/64"    |
| CHA CSK8S  | #8               | 1/4"       | 1-5/8"         | 11/32"    |
| CHA CSK10S | #10              | 1/4"       | 1-5/8"         | 25/64"    |



## MULTI-PURPOSE DRILL BITS



### Drill A Variety Of Materials:

Masonry, Concrete, Plastics, Wood And Metal

Carbide Tipped Point For Fast Penetration

For Use In Handheld Power Drills Or Drill Presses

| SKU          | OVERALL LENGTH | SKU          | OVERALL LENGTH                                 |
|--------------|----------------|--------------|------------------------------------------------|
| CHA MPB-1/8  | 2-3/4"         | CHA MPB-3/8  | 4-3/4"                                         |
| CHA MPB-5/32 | 3-1/4"         | CHA MPB-1/2  | 6"                                             |
| CHA MPB-3/16 | 3-1/4"         | CHA MPB-SET5 | Contains 1 ea. 1/8", 5/32", 3/16", 1/4", 5/16" |
| CHA MPB-1/4  | 4"             |              |                                                |
| CHA MPB-5/16 | 4-3/4"         |              |                                                |

## FIBER DISCS

United Abrasives/SAIT™ fiber discs are made using a premium resin over resin construction. Packaged in a unique bulk spindle that ensures that each disc remains perfectly flat. This unique design offers easy access and can be retightened



METAL

## AO ALUMINUM OXIDE

Open coat structure for more material removal and better finishing.

- Vulcanized fiber backing for heavy duty sanding.
- Resin over resin construction for a strong bond, resistant to heat/moisture

| SKU      | SIZE          | GRIT | CTN. QTY. |
|----------|---------------|------|-----------|
| UA 52416 | 4-1/2" x 7/8" | 16   | 100       |
| UA 52424 | 4-1/2" x 7/8" | 24   | 100       |
| UA 52436 | 4-1/2" x 7/8" | 36   | 100       |
| UA 52450 | 4-1/2" x 7/8" | 50   | 100       |
| UA 52460 | 4-1/2" x 7/8" | 60   | 100       |
| UA 52480 | 4-1/2" x 7/8" | 80   | 100       |
| UA 52400 | 4-1/2" x 7/8" | 100  | 100       |
| UA 52420 | 4-1/2" x 7/8" | 120  | 100       |

| SKU      | SIZE      | GRIT | CTN. QTY. |
|----------|-----------|------|-----------|
| UA 52716 | 7" x 7/8" | 16   | 100       |
| UA 52724 | 7" x 7/8" | 24   | 100       |
| UA 52736 | 7" x 7/8" | 36   | 100       |
| UA 52750 | 7" x 7/8" | 50   | 100       |
| UA 52760 | 7" x 7/8" | 60   | 100       |
| UA 52780 | 7" x 7/8" | 80   | 100       |
| UA 52700 | 7" x 7/8" | 100  | 100       |
| UA 52720 | 7" x 7/8" | 120  | 100       |

## FLAP DISCS



- Flap discs are constructed by layering coated abrasive flaps so they wear away and expose new, sharp grain
- They increase productivity and reduce total grinding and finishing costs by grinding, blending & finishing in 1 step




5/8-11 Hub



## SAIT ENCORE PLUS+ REGULAR DENSITY

- Premium zirconium grain on a durable polyester-cotton backing provides fast cutting action and long life
- Will not contaminate stainless steel



Conical Shape-Type 29

METAL  
STAINLESS  
ALUMINUM

| SKU      | DIAMETER | ARBOR SIZE | GRIT | MAX RPM | BOX QTY | CTN QTY |
|----------|----------|------------|------|---------|---------|---------|
| UA 72250 | 4-1/2"   | 7/8"       | 40   | 13,300  | 10      | 40      |
| UA 72251 | 4-1/2"   | 7/8"       | 80   | 13,300  | 10      | 40      |
| UA 72350 | 4-1/2"   | 5/8"-11    | 36   | 13,300  | 10      | 40      |
| UA 72351 | 4-1/2"   | 5/8"-11    | 60   | 13,300  | 10      | 40      |
| UA 72352 | 4-1/2"   | 5/8"-11    | 36   | 13,300  | 10      | 40      |
| UA 72252 | 4-1/2"   | 5/8"-11    | 40   | 13,300  | 10      | 40      |
| UA 72353 | 4-1/2"   | 5/8"-11    | 60   | 13,300  | 10      | 40      |
| UA 72253 | 4-1/2"   | 5/8"-11    | 80   | 13,300  | 10      | 40      |

## BACKING PADS For Resin Fiber Discs

NOTE: Pad nut must be purchased separately. This backing pad is not to be used with SAIT-LOK™ quick change fiber discs



| SKU      | SIZE   | ARBOR          | MAX RPM | BOX QTY. |
|----------|--------|----------------|---------|----------|
| UA 95011 | 4-1/2" | 5/8"           | 11,000  | 1        |
| UA 95018 | 7"     | 5/8"-11 Thread | 8,500   | 1        |

## A60S GENERAL PURPOSE

For general purpose cutting of all ferrous metals.

- Extremely fast cutting and long life for steel, pipe, rebar, channel and angle iron.
- UA 23101 is the industry standard for fast cutting ferrous metals with a 4-1/2" grinder.



METAL

| SKU      | DIAMETER | WIDTH | BORE | MAX RPM | BOX QTY. | CTN QTY. |
|----------|----------|-------|------|---------|----------|----------|
| UA 23101 | 4-1/2"   | .045  | 7/8" | 13,300  | 50       | 200      |

## AZX ZIRCONIUM

Premium zirconium grain to reduce heat build up and reduce loading.

- For stainless steel, high tensile steel, titanium, aluminum, ferrous metals.
- Vulcanized fiber backing for heavy duty sanding.
- Resin over resin construction for a strong bond, resistant to heat & moisture.
- Available with SAIT-LOK quick-change hub which requires fewer changes.



METAL

STAINLESS

| SKU      | SIZE          | GRIT | CTN. QTY. |
|----------|---------------|------|-----------|
| UA 69224 | 4-1/2" x 7/8" | 24   | 100       |
| UA 69226 | 4-1/2" x 7/8" | 36   | 100       |
| UA 69250 | 4-1/2" x 7/8" | 50   | 100       |
| UA 69260 | 4-1/2" x 7/8" | 60   | 100       |
| UA 69280 | 4-1/2" x 7/8" | 80   | 100       |

| SKU      | SIZE      | GRIT | CTN. QTY. |
|----------|-----------|------|-----------|
| UA 69624 | 7" x 7/8" | 24   | 100       |
| UA 69636 | 7" x 7/8" | 36   | 100       |
| UA 69650 | 7" x 7/8" | 50   | 100       |
| UA 69660 | 7" x 7/8" | 60   | 100       |
| UA 69680 | 7" x 7/8" | 80   | 100       |

## DEW DWE402

### 4-1/2" Small Angle Grinder

- Large spiral bevel gear provides long transmission life
- Oversized brushes provide 2X brush life over previous model
- Dust Ejection System™ ejects damaging dust and debris particles that enter the tool
- Quick-Change™ Release
- Paddle switch with safety lock-off prevents accidental start up



Includes

2-Position Side Handle, 4-1/2" One-Touch™ (T27) Guard

|                                 |            |
|---------------------------------|------------|
| AMPS                            | 11 Amps    |
| MAX WATTS OUT                   | 1400W      |
| HORSEPOWER                      | 1.8 HP     |
| NO LOAD SPEED                   | 11,000 RPM |
| USE WHEELS RPM ABOVE            | 11,000 RPM |
| SPINDLE THREAD                  | 5/8"-11    |
| SWITCH TYPE                     | Paddle     |
| DUST EJECTION SYSTEM™           | Yes        |
| TOOL-FREE FLANGE SYSTEM         | Yes        |
| E-CLUTCH® / OVERLOAD PROTECTION | No         |
| TOOL LENGTH                     | 12"        |
| TOOL WEIGHT                     | 4.6 lbs    |

## TRIGGERFOAM PRO™

### WINDOW & DOOR

Window and Door formula does not distort window and door frames when expanded. Adheres to wood, metal, masonry and concrete. Seals gaps and joints, insulates, stops air infiltration and saves time and money. Ideal for use around pipes, wires and ductwork.



| TriggerFoam Pro                                                                                                                            | Hilti                                                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Pro Windows/Doors<br>29 oz.<br>Orange<br>Gun Applied<br>Flame: 0<br>Smoke: 10<br>Type V Res. Fire Block<br>Meets E814<br>18 mo. Shelf life | CF-812<br>23 oz.<br>Off-White<br>Gun Applied<br>Flame: 0<br>Smoke: 5<br>Not a Fire Block<br>-<br>12 mo. Shelf life |



CODE LISTED  
ICC-ES ESR-3263  
CATEGORY I  
Fireblocking in  
Residential Construction

| SKU        | DESCRIPTION                                  | CTN. QTY |
|------------|----------------------------------------------|----------|
| POW 08134P | TriggerFoam Pro™ Window & Door Formula 29 oz | 12       |

## CUTTING BLADES



## SCREW DRIVING BITS

Insert bits are commonly used with a bit holder in power tool applications. This combination is economical, provides flexibility and allows fasteners to be magnetically held by the bit. Power bits are placed directly into the power tool chuck

### PHILLIPS

#### 1/4" Hex Insert Bits

| SKU         | POINT SIZE | OVERALL LENGTH |
|-------------|------------|----------------|
| APE 440-1X  | #1         | 1"             |
| APE 440-2X  | #2         | 1"             |
| APE 440-22X | #2         | 2"             |
| APE 440-3X  | #3         | 1"             |
| APE 440-4X  | #4         | 1-5/16"        |

#### 1/4" Hex Insert Bits Limited Clearance

| SKU        | POINT SIZE | OVERALL LENGTH |
|------------|------------|----------------|
| APE 446-1X | #1         | 1"             |
| APE 446-2X | #2         | 1"             |

#### 1/4" Hex Power Drive


| SKU        | POINT SIZE | OVERALL LENGTH |
|------------|------------|----------------|
| APE 491-X  | #1         | 1-15/16"       |
| APE 491-AX | #1         | 2-3/4"         |
| APE 491-BX | #1         | 3-1/2"         |
| APE 491-CX | #1         | 6"             |
| APE 492-X  | #2         | 1-15/16"       |
| APE 492-AX | #2         | 2-3/4"         |
| APE 492-BX | #2         | 3-1/2"         |
| APE 492-CX | #2         | 6"             |
| APE 493-X  | #3         | 1-15/16"       |
| APE 493-AX | #3         | 2-3/4"         |
| APE 493-BX | #3         | 3-1/2"         |
| APE 493-CX | #3         | 6"             |
| APE 494-X  | #4         | 1-15/16"       |

### MAGNETIC 1/4" Power Drive Nutsetters

| SKU       | SIZE  | OVERALL LENGTH | SCREW SIZE |
|-----------|-------|----------------|------------|
| MDA-08    | 1/4"  | 1-3/4"         | #6-#8      |
| MDA-10    | 5/16" | 1-3/4"         | #10-#12    |
| MDA-12    | 3/8"  | 1-3/4"         | #14        |
| MDB-08    | 1/4"  | 2-9/16"        | #6-8       |
| MDB-10    | 5/16" | 2-9/16"        | #10-#12    |
| MDB-12    | 3/8"  | 2-9/16"        | #14        |
| MDB-14    | 7/16" | 2-9/16"        | #14        |
| MSHL-5/16 | 5/16" | 6"             | #10-#12    |

#### 1/4" Bit Holders

| SKU | OVERALL LENGTH | SKU     | OVERALL LENGTH |
|-----|----------------|---------|----------------|
| MBH | 3"             | M-490-6 | 6"             |

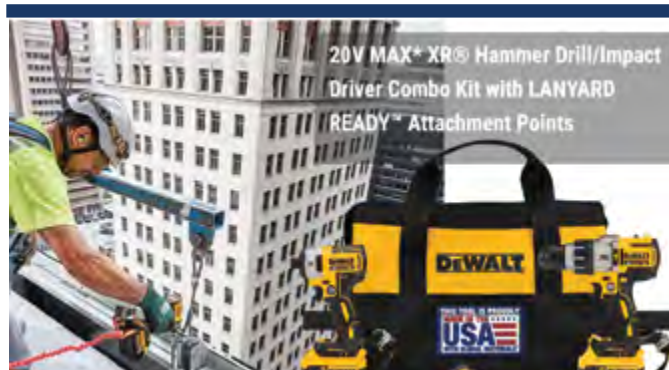

### TETHERED TOOL BY TANNER - LANYARD READY

DEWALT Lanyard Ready™ Power Tools feature an integrated attachment point for secure tethering to rigid structures on jobsites while working at height. The lanyard used with your power tool should be a maximum of 6.5 ft. in case the tool is dropped



# Fasteners, Anchors & Tools

## Tanner Has You Covered



Construction Fasteners



Commercial Fasteners  
Steel and Stainless Steel



Blind Fasteners



Security Products



Anchoring Systems



Power Tools



Lifting Equipment & Slings



Cutting Tools



Safety Products



Personal Protection Equipment



Metal Framing Systems



Hand Tools



Shims



Firestopping



Protective Coatings



Industrial Hardware Supplies



Ladders



**TannerBolt.com** 800 456-2658

#### Texas Pick Up Centers

SSG Texas-Arlington  
2020 Exchange Drive  
Arlington, TX 76011

SSG Texas-Houston  
423 Blueberry Street  
Houston, TX 77018

#### New York Headquarters

714 Montauk Ave., Brooklyn, NY 11208

#### New York Locations

800 3rd Ave., Brooklyn, NY 11232  
60-01 55th Drive, Maspeth, NY 11378  
168 Broadhollow Rd., Farmingdale, NY 11735